

**Features**

- 2WATT SIP PACKAGE
- EFFICIENCY TO 86%
- 100% BURNED IN
- No-load Input Current as Low as 5mA
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE
- UNREGULATED OUTPUT TYPES



**2 Watt DC/DC  
Converter**

**2 Watt Single O/P  
Isolated DC-DC Converter**

**Input Specifications**

|                     |       |
|---------------------|-------|
| Input Voltage       | :5Vdc |
| Input Voltage Range | :±10% |

**Output Specifications**


|                          |                            |                                |
|--------------------------|----------------------------|--------------------------------|
| Output Voltage           | :15Vdc                     |                                |
| Output Voltage Accuracy  | :±5%                       | @Vout=14.25-15.75Vdc@Vin=15Vdc |
| Output Current           | :133mA                     |                                |
| Efficiency               | :86% TYP                   |                                |
| Ripple / Noise           | :75mVp-p TYP, 150mVp-p MAX | @20MHz Bandwidth               |
| Short Circuit Protection | : Continuous               |                                |
| Line Regulation          | :±1.2% TYP                 | @ For 1.0% OF Vin              |
| Load Regulation          | :±4% TYP, ±10% MAX         | @10% to 100% full load         |
| Capacitive Load          | :220uF MAX                 |                                |

**General Specifications**

|                             |                       |                                                              |
|-----------------------------|-----------------------|--------------------------------------------------------------|
| Operating Temperature Range | : -40°C ~ +105°C      |                                                              |
| Storage Temperature         | : -55°C ~ +125°C      |                                                              |
| Switching Frequency         | : 250KHz TYP          |                                                              |
| Humidity                    | : 95% MAX             |                                                              |
| Isolation Voltage           | : 3000Vdc             | @Input to Output ( 60sec/0.5mA )                             |
| Isolation Resistance        | : 1000MΩ MIN          | @ 500Vdc                                                     |
| Cooling                     | : Free air convection |                                                              |
| MTBF                        | : >3500000 Hours      | MIL-HDBK-217F@25°C, Ground Benign.                           |
| Case Material               | : DAP                 |                                                              |
| Weight                      | : 1.7g TYP            |                                                              |
| EMI                         | CE                    | CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit) |
|                             | RE                    | CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit) |
| EMS                         | ESD                   | IEC/EN61000-4-2 Air ±8kV , Contact ±6kV perf. Criteria B     |

Temperature Derating Graph


Part Number

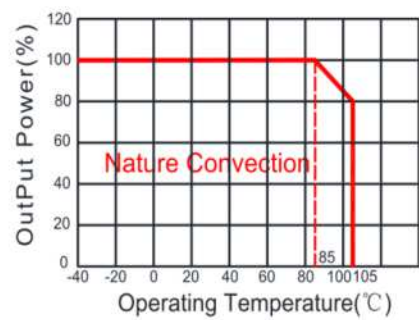

13DC - 05 S 15 N 3 P 2 H3  
A B C D E F G H I

A: Series  
B: Input Voltage  
C: Single Output  
D: Output Voltage  
E: Unregulated(N)  
F: Package  
G: Protection  
H: Output Power  
I: Isolation Voltage


Recommended Test Circuit

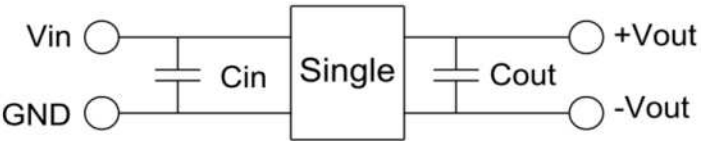

| Vin  | Cin       | Single Vout | Cout     |
|------|-----------|-------------|----------|
| 5Vdc | 4.7μF/25V | 15Vdc       | 10μF/16V |


To make sure the product work at perfect operation status with full loading external capacitor is necessary and it is recommended to use high frequency low resistance electrolytic capacitor.

EMC (CLASS B) compliance circuit

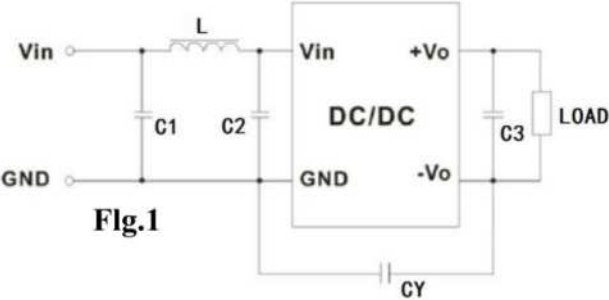

| EMC recommended circuit value table |    |                          |
|-------------------------------------|----|--------------------------|
| EMI                                 | C1 | 4.7μF /50V               |
|                                     | C2 | 4.7μF /50V               |
|                                     | CY | 1nF/4kV                  |
|                                     | C3 | Recommended Test Circuit |
|                                     | L  | 6.8μH                    |

Outline Dimensions

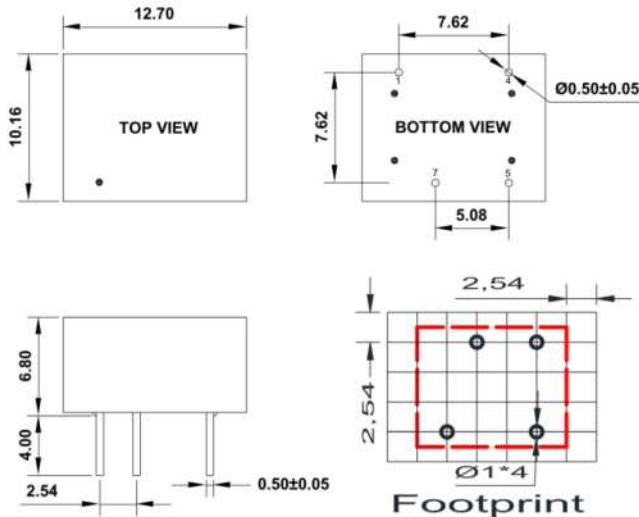

UNIT:mm Unless otherwise specified,all tolerances are ±0.25


| PIN    | 1    | 4    | 5     | 7     |
|--------|------|------|-------|-------|
| Single | -Vin | +Vin | +Vout | -Vout |

Packing Information:

Weight----- 1.7grams/pcs

TUBE-----40pcs

Weight: 87g per tube

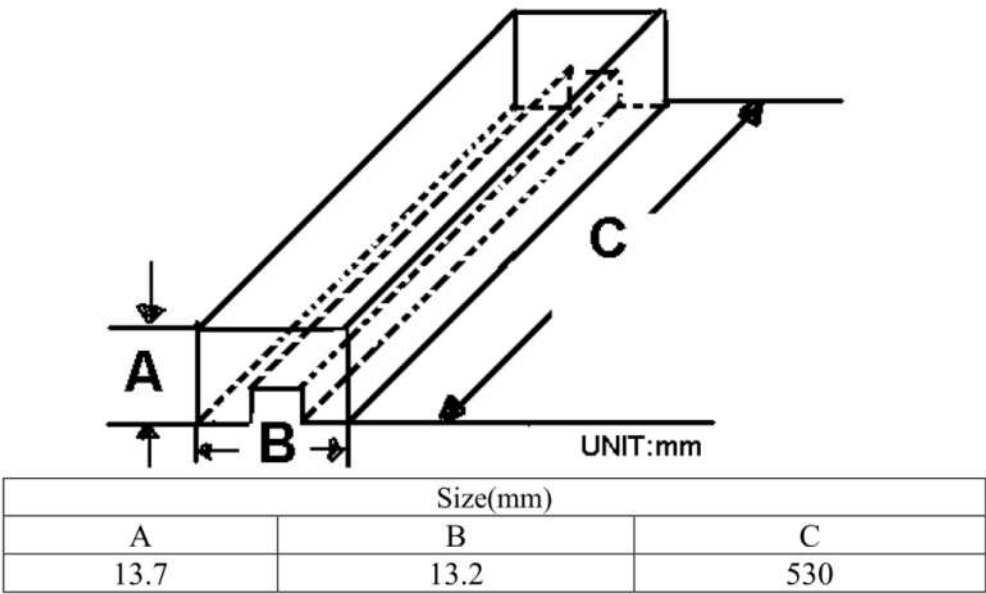

Outer carton unit: 3200pcs/80Tube/box

Weight: 7.2kg per carton

